




SERIES 8300 SLIDING WINDOW

- + Reinforced multi-cavity construction offers additional thermal protection and structural integrity
- + Positive-action cam lock enhances safety (2 locks standard at 27 1/4" or higher)
- + Insulated glass panels with optimum thermal air space featuring a warm-edge spacer system
- + Tandem rollers ride easily along friction free glide channel
- + Integrated glide rail for easy sash opening and closing
- + Available in 1/4 - 1/2 - 3/4 or 1/3 - 2/3 - 1 configurations
- + XO or OX 2-lite styles available
- + Half screen comes standard*
- + Sloped sill reduces air infiltration and accommodates easy water run-off
- + Interlocking sashes help block out drafts
- + Fusion-welded sashes and frame add strength and additional insulation
- + Dual-fin weather stripping helps reduce air infiltration
- + Jamb depth: 3.25"
- + Transferable limited lifetime warranty



2-lite sliding window

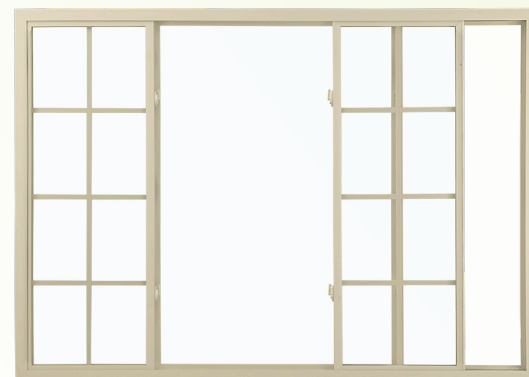


3-lite sliding window

CUSTOM Options

- + Low-E Glass
- + Low-E Glass + Argon Gas
- + Ultra Low-E Glass + Argon Gas
- + InsulKor™ multi-cavity foam-filled frame injections
- + Obscure glass
- + Double strength glass
- + Optional 5/8" or 3/4" flat, 5/8" or 1" contoured, 5/8" contoured valance grids available
- + Nine painted exterior colors (white interior only)
- + Charcoal aluminum, Clear View, Heavy Duty and FLEXSCREEN® screens*
- + Lifetime glass breakage warranty

+ COLOR OPTIONS**

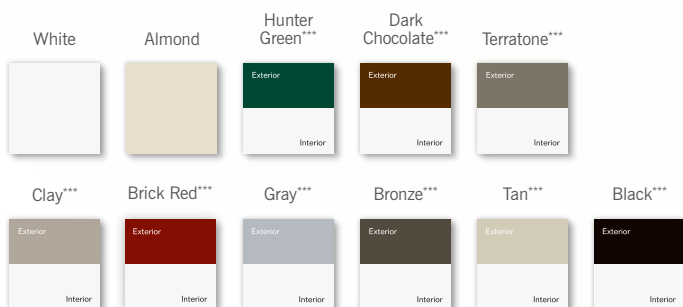

Scan to watch a video about our Series 8300.



Select styles and glass packages can be ordered to meet ENERGY STAR® 7 guidelines. See your Atrium Territory Sales Manager for details.



Note: Manufacturer reserves the right to substitute components as necessary for continued product improvement.

* Screens are not meant to restrain a child from falling through an open window.

** Printing process may affect color shown. Please refer to actual window sample when selecting colors.

*** Grid offering limited to 5/8" contoured or SDL on exterior painted windows. Only use mild, water based household cleaner on painted product and rinse immediately with water. See full cleaning instructions for details. REV 11/23